


NOTES:

1. FENCE SHALL MAY BE:

CONCRETE RANCH RAIL, AS PROVIDED BY TIMBERCRETE OR APPROVED EQUAL. COLOR: TAN., OR SUPERIOR RAIL BY SUPERIOR CONCRETE PRODUCTS. COLOR: PUEBLO

- 2. OPTION: IF APPROVED IN WRITING BY THE CITY'S LANDSCAPE ARCHITECT, FENCE MAY BE CONSTRUCTED OUT OF WOOD AND SHALL FOLLOW THESE REQUIREMENTS:
  - a. ALL WOOD SHALL BE WESTERN RED CEDAR.
  - b. ALL HARDWARE SHALL BE HOT DIPPED GALVANIZED.
  - c. SLOPE RAILS WITH GRADE, DO NOT STEP
  - d. ATTACH BRACKETS TO RAILS & POSTS WITH 10d COMMON, GALVANIZED NAILS.
  - e. BRACKET SHALL BE 18 GAUGE GALVANIZED STEEL.
  - f. FENCE TO BE PAINTED WITH PRIMER AND 2 COATS PAINT. COLOR TO BE TAN.

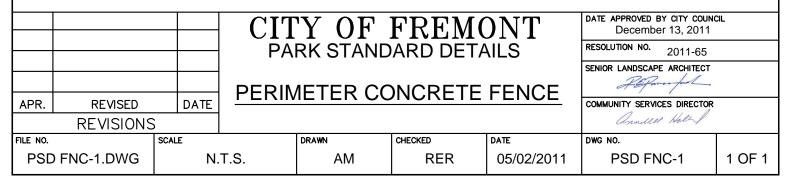

**BRACKET ENLARGEMENT** 

(FOR WOOD FENCE ONLY)